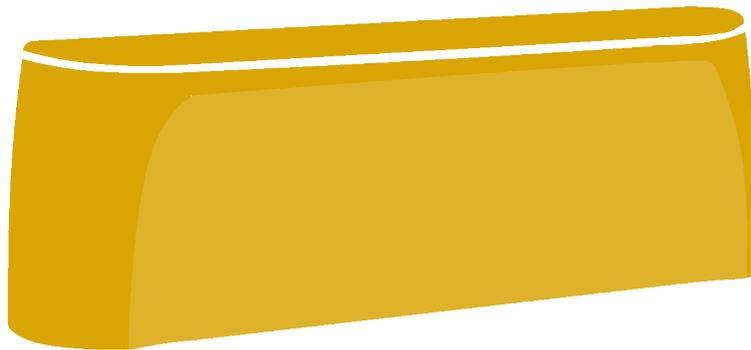


RYNO[®] BENCH → FLOOR FASTENING



These instructions apply only when fixing to a concrete floor with no obstructions (e.g. under floor heating, cables, plumbing, etc.). When fixing to any other surface, or with obstructions, please contact your Pineapple representative for further advice

REQUIRED ITEMS

- 2 x floor brackets
(only provided with floor fixed version)
- 2 x M6 screws
(only provided with floor fixed version)
- 8 x M8 washers
(only provided with floor fixed version)
- 8 x concrete hardware fastenings
- Handheld power drill
- 1 x masonry drill bit
- Wrench/socket set
- 1 x T27 security drill bit
- Straight edge for floor fixing

| |
|--|
| |
| |
| |
| |
| |
| |
| |

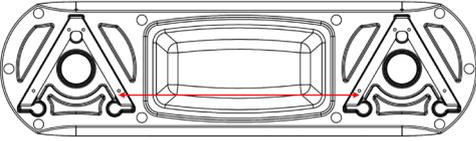
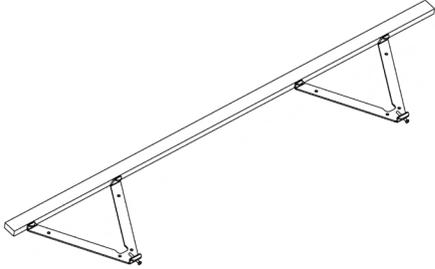
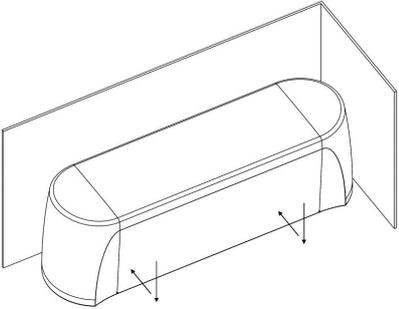


+44 (0)1622 237830

sales@pineapplecontracts.com

Pineapple

RYNO[®] BENCH → FLOOR FASTENING

| | | |
|---|---|---|
| <h2>01</h2> | <p>Ensure Brackets are fully fastened to the base of the bench. Measure between the two closest holes of the two brackets and make note of this dimension</p> |  |
|  | <p>Place one bracket on the ground ensuring it is the correct distance from any walls as shown in the diagram. (90mm from a back wall and 60mm from a side wall). Place down the second bracket the distance apart as previously measured in step 1.</p> | <h2>02</h2> |
| <h2>03</h2> | <p>Place the straight edge at the back of the brackets to ensure they remain parallel. Drill through one hole in each bracket ensuring they do not move. And put in the concrete hardware to hold the brackets in position. Drill through all the remaining holes and place in hardware as you go along to ensure the brackets stay in position. (If the floor is especially uneven, place the included washers under the brackets to level them before fixing the brackets to the ground.)</p> |  |
|  | <p>Place bench onto brackets and flush to floor, ensuring brackets line up with the indents on the underside of the product. Then, push back until brackets hook into the product.</p> | <h2>04</h2> |



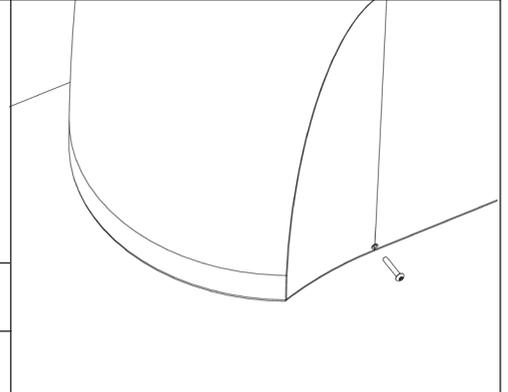
+44 (0)1622 237830

sales@pineapplecontracts.com

Pineapple

05

Insert M6 screws into the front of the product and ensure correct location into brackets. Start both screws by hand to ensure no risk of cross-threading. Finally tighten each one fully ensuring the product moves back evenly.



DISCLAIMER

- Ensure the proper and adequate hardware is used to secure furniture
- Ensure fastenings are appropriate for the anchoring material
- Use fastenings of an appropriate strength and consider using security fixings in challenging environments
- Consider using high strength thread-locker on fastenings in challenging environments
- Ensure all gaps are sealed with the appropriate anti-pick mastic after product installation if necessary
- Please read all instructions carefully to ensure proper installation. Failure to read and follow instructions may result in inadequate product installation and void of warranty
- Pineapple shall not be held liable for any consequences caused by the improper installation of products to the installer or the end user



+44 (0)1622 237830

sales@pineapplecontracts.com

Pineapple